

Experimental Investigation on Convective Heat Transfer Analysis in the Carbon steel Circular Tube with Internal Threads

¹Asma Qureshi, ²Sanjay Dwivedi

Department of Mechanical Engineering, Sagar Institute of Research & Technology, Bhopal, RGPV, India

Abstract: The present paper focuses on Experimental analysis of heat transfer and experimental investigation of Heat Transfer enhancement through circular duct of carbon steel using internal threads of pitch 5 mm and 10 mm with air as the working fluid. The transitional flow regime is selected for this study with the Reynolds number range 7,000 to 14,000. The duct was subjected to constant and uniform heat flux. The experimental data obtained were compared with those obtained from plain duct.

The effects of internal threads of varying depth on heat transfer and friction factor were presented. Based on the same pumping power consumption, the duct with internal threads possesses the highest performance factors for turbulent flow. The heat transfer coefficient enhancement for internal threads is higher than that for plain duct for a given Reynolds number. The use of internal threads improved the performance of circular duct.

Keywords: heat transfer enhancement, carbon steel duct, internal threads.

I. INTRODUCTION

The heat generated within the system must be dissipated to its surrounding in order to maintain the system at its recommended working temperature and functioning effectively and reliably. Increase in Heat exchanger's performance can lead to more economical design of heat exchanger which can help to make energy, material & cost savings related to a heat exchange process. The need to increase the thermal performance of heat exchangers, thereby effecting energy, material & cost savings have led to development & use of many techniques termed as Heat transfer Augmentation.

These techniques are also referred as Heat transfer Enhancement or Intensification. Augmentation techniques increase convective heat transfer by reducing the thermal resistance in a heat exchanger. Use of Heat transfer enhancement techniques lead to increase in heat transfer coefficient but at the cost of increase in pressure drop. So, while designing a heat exchanger using any of these techniques, analysis of heat transfer rate & pressure drop has to be done. Apart from this, issues like long-term performance & detailed economic analysis of heat exchanger has to be studied. To achieve high heat transfer rate in an existing or new heat exchanger while taking care of the increased pumping power, several techniques have been proposed in recent years.

Turbulent flow in complex geometries receives considerable attention due to its importance in many engineering applications and has been the subject of interest for many researchers. Some of these include the energy conversion systems found in some design of process industries, cooling of evaporators, thermal power plants, air conditioning equipment radiators of space vehicle and automobiles and modern electronic equipment's. The present experimental study investigates the increase in the heat transfer rate between pipes heated with a constant uniform heat flux with air flowing inside it using internal threads of varying pitch. As per the available literature, the enhancement of heat transfer using internal threads in turbulent region the present work has been carried out with turbulent flow (Re number range of 17,000-30,000) as the flow problems in industrial heat exchangers involve turbulent flow region. The experiments are conducted on test rig of Aluminum and carbon steel duct initially without using any internal threads and with using internal threads of different pitches ($p=1\text{ cm}$ & 0.5 cm) and various heat transfer characteristics are calculated.

II. REAL TIME WORK ENVIRONMENT

The apparatus consists of a blower unit fitted with a duct, which is connected to the test section located in horizontal orientation. Nichrome bend heater encloses the test section to a length of 47 cm. Three thermocouples T2, T3 and T4 at a distance of 15 cm, 30 cm and 45 cm from the origin of the heating zone are embedded on the walls of the duct and two thermocouples are placed in the air stream, one at the entrance (T1) and the other at the exit (T5) of the test section to measure the temperature of flowing air as shown in Fig. 1. The duct system consists of a valve, which controls the airflow rate through it and an orifice meter to find the volume flow rate of air through the system. The diameter of the orifice is 1.4 cm and coefficient of discharge is 0.64. The two pressure tapings of the orifice meter are connected to a water U-tube manometer to indicate the pressure difference between them. Input to heater is given through dimmer stat. The test tube of 18 mm thickness was used for experimentation. Display unit consists of voltmeter, ammeter and temperature indicator.

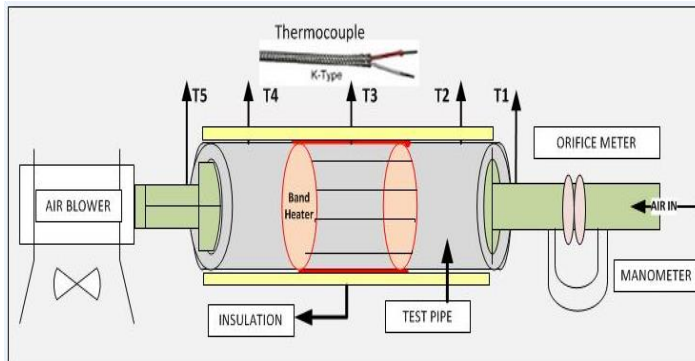


Fig. 1 Experimental Setup Layout



Fig. 2 Test Duct with internal pitches

If p = pitch of the thread, d = depth of the thread and r = radius at the top and bottom of the threads, then: $d = (0.54127 * p)$ and $r = (0.14434 * p)$

III. WORKING PROCEDURE

A series of experiments carried out with Circular duct. A suction mode blower is used to draw the air in Circular duct. The heated test section is 47cm long. At the inlet T_{b1} is the inlet bulk temperature measured by thermocouple and T_{b5} exit bulk temperature.

Experiments were carried out in following steps.

3.1 Without Internal threads:

Initially, the experiment was carried out on plain duct without internal threads. The working fluid air flows through the duct section with least resistance.

3.2 With Internal threads of varying depth:

The internal threads were done on duct as shown in Fig. 2. The three different test ducts of varying depth were used for experimentation. The presence of the internal threads in the duct causes resistance to flow and increases turbulence. The mass flow rates of air and the heat input were kept constant as that of plain duct experiment.

IV. DATA REDUCTION

The data reduction of the measured results is summarized in the following procedures:

The duct surface and in/out temperature:-

$$T_s = (T_2 + T_3 + T_4) / 3 \quad \text{-(Equation I)}$$

$$T_b = (T_1 + T_5) / 2 \quad \text{-(Equation II)}$$

Discharge of air:-

$$Q = C_d * A_1 * A_2 \sqrt{2gh_{air}} / \sqrt{(A_{12} - A_{22})} \quad \text{-(Equation III)}$$

Equivalent height of air column:-

$$h_{air} = (\rho_w * h_w) / \rho_w \quad \text{-(Equation IV)}$$

Velocity of air flow:-

$$V = (Q/A) \quad \text{- (Equation V)}$$

Where A =convective heat transfer area ($\Pi * D * L$)

$$Re = (\rho * V * D) / \mu \quad \text{- (Equation VI)}$$

Where D = inner diameter of duct and L= Length of duct

Total Heat Transfer:-

$$Q = Qc + Qr \quad \text{- (Equation VII)}$$

$$Q = m Cp (T1 - T5) \quad \text{- (Equation VIII)}$$

Where m= mass flow of air

Qc = Convective Heat Transfer

Qr = Radiation Heat Transfer

$$Qr = \sigma A \epsilon (Ts^4 - Tb^4) \quad \text{- (Equation IX)}$$

$$h = (Q - Qr) / (A (Ts - Tb)) \quad \text{- (Equation X)}$$

Experimental Nusselt number:-

$$Nu = h * (D / K) \quad \text{- (Equation XI)}$$

Nusselt numbers calculated from the experimental data for plain tube were compared with the correlation recommended by Dittus-Boelter.

Theoretical Nusselt number:-

$$Nu = 0.023 Re^{0.8} pr^{0.4} \quad \text{- (Equation XII)}$$

In straight duct lengths, Pressure drop (ΔP) can be calculated using the Darcy Equation

f = Darcy friction factor

$$\Delta P_{Friction} = \frac{f \cdot L_{Pipe} \cdot \rho \cdot u^2}{d_{pipe} \cdot 2}$$

V. RESULT ANALYSIS

From the Fig.3, it is observed that the heat transfer coefficient increases with increase in Reynolds no. As Reynolds no. increases, the air flow will cause more turbulence so due to which the heat transfer rate will increase. From the Fig.4 it is observed that the circular duct without using any internal threads gives the less heat transfer coefficient with the use of internal threads of pitch 1cm create more turbulence in duct which increases the heat transfer coefficient. An internal thread of pitch 0.5 cm gives maximum value of heat transfer coefficient as compared to internal threads of pitch 1cm.

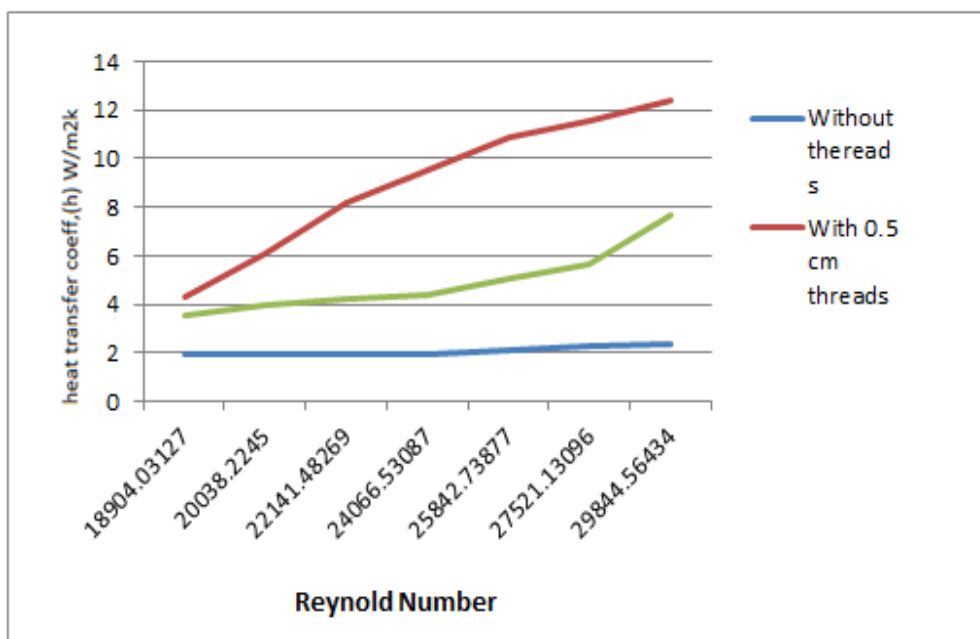


Fig. 3 Heat transfer coefficient Vs Reynolds Number

From the Fig. 4. it is observed that there is increase in Nusselt number as increase in Reynolds number .As Reynolds number increases the air flow will cause more turbulence due to which heat transfer rate will increase in heat transfer coefficient (h) and $Nu=hDh/k$ i.e increase in heat transfer coefficient increases the Nusselt number. From fig 4. it is observed that maximum Nusselt number is obtained for internal thread of pitch $p= 0.5$ cm as compared to $p= 1$ cm and without internal threads.

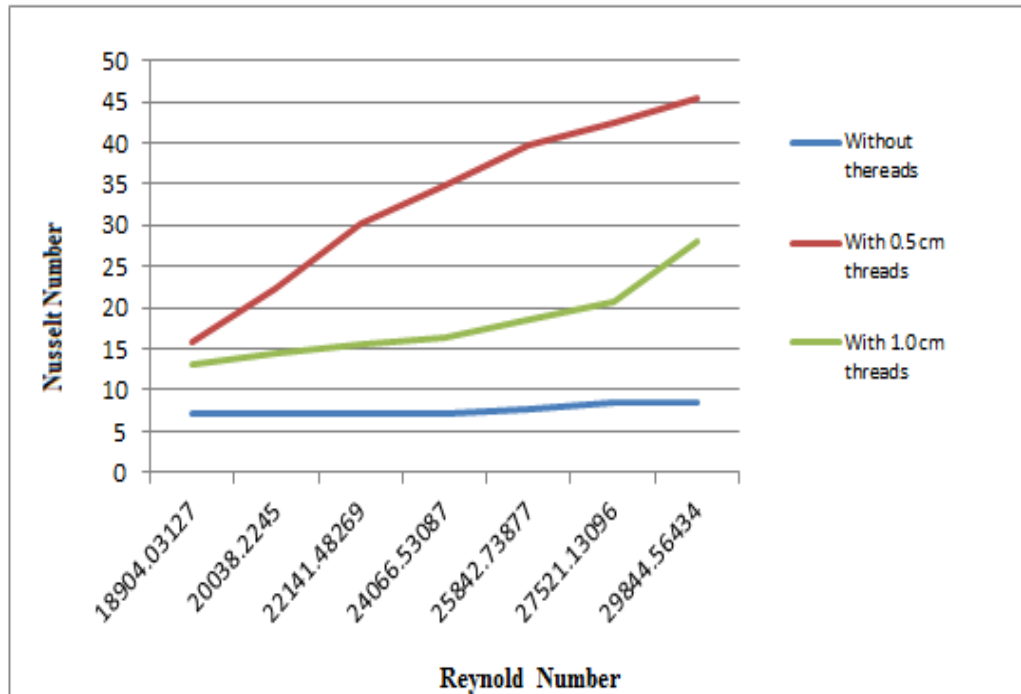


Fig. 4 Nusselt Number Vs Reynolds Number

From the Fig.5 it is observed that as the Reynolds increases there is decrease in friction factor. As the velocity goes on increasing with Reynolds number and friction factor is inversely proportional to the velocity. From fig.5 it is observed that least friction factor is obtained in duct without internal threads and maximum friction factor is observed in with internal threads of pitch ($p=0.5$ cm).

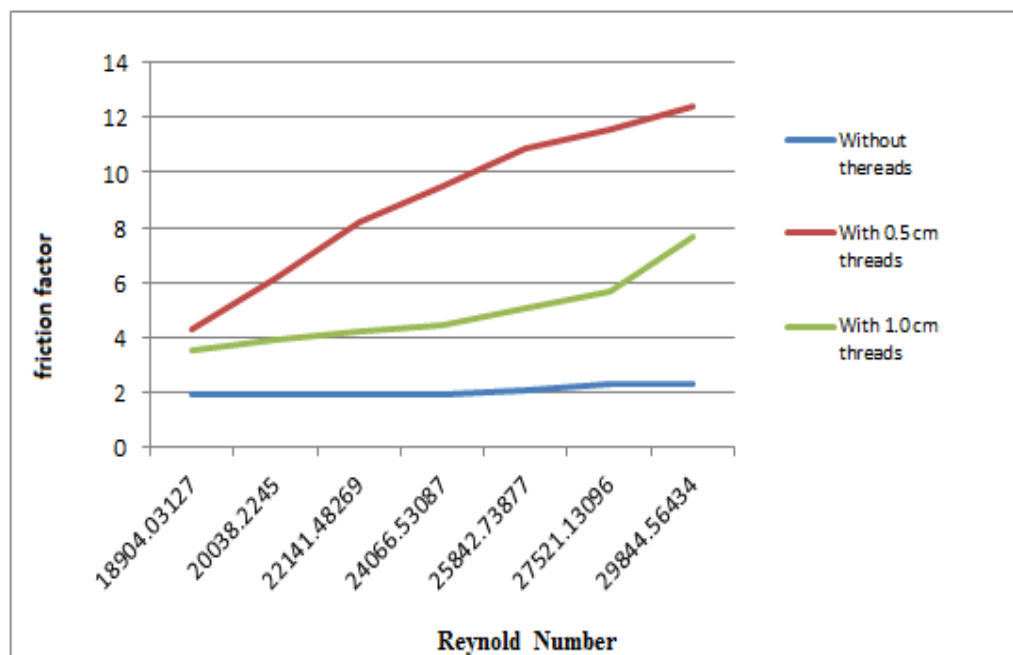


Fig. 5 Friction Factor Vs Reynolds Number

VI. CONCUSSION

Experimental investigations have been carried out to study the effects of the internal threads of different pitches ($p= 1\text{cm}$ & 0.5 cm) on the performance Circular duct of Carbon steel. Heat transfer coefficient and friction factor are analyzed with using passive heat transfer enhancement methods. From the graph plotted above following conclusions are made.

- The heat transfer rate increases in duct with the internal threads as compared to without internal threads. The result shows that the heat transfer rate increases as the Reynolds number increases.
- The internal threads of pitch $p= 0.5\text{ cm}$ causes the maximum turbulence in the duct due to which maximum heat transfer to occur
- As the pitch of internal threads decreases it is found that there is increase in heat transfer rate but increases in friction factor is observed. So it can be concluded that minimum the pitch of internal threads maximum the heat transfer rate but more frictional losses will occur.
- The performance of horizontal duct can be improved by the use of internal threads. The cost involved for making internal threads is minimal compared to energy efficiency improvement provided by this technique.

REFERENCES

- [1] S.S Hsieh, M.H. Liu, H.H. Tsai (2003), "Turbulent heat transfer and flow characteristic in a horizontal circular tube with strip-type inserts part-II (heat transfer)", International Journal of Heat and Mass Transfer, Vol. 46, pp.837-849.
- [2] B.I Pavel and A.A. Mohamad (2004), " An experimental and numerical study on heat transfer enhancement for gas heat exchangers fitted with porous media", International Journal of Heat and Mass Transfer, Vol. 47, pp.4939-4952.
- [3] Rao, M. M. and Sastri, V. M. K. (1995), "Experimental investigation for fluid flow and heat transfer in a rotating tube twisted tape inserts", International Journal of Heat and Mass Transfer, Vol.16, pp.19-28.
- [4] Sivashanmugam, P. and Suresh, S. (2007), "Experimental studies on heat transfer and friction factor characteristics of turbulent flow through a circular tube fitted with regularly spaced helical screw tape inserts", Experimental Thermal and Fluid Science, Vol. 31, pp. 301-308.
- [5] SHUBHAM N DAMBIWAL, SUMEDHBODHI A DAHIWALE, MANGESH M SAWALKAR (2014), "ANALYSIS OF HEAT TRANSFER THROUGH CIRCULAR DUCT USING INTERNAL THREADS OF VARYING PITCH" IJPRET, 2014; Volume 2 (9): 269-277.
- [6] R.K. Rajput, a text book of —Heat and Mass Transfer, [12] C.P. Kothandaraman, S Subramanyan —Heat and Mass Transfer Data bookl.