

# Low Propagation Delay Routing Protocol for Acoustic Underwater Sensors Network

Madhu Chhikara<sup>1</sup>, Kiran Narang<sup>2</sup>

<sup>1</sup>M. Tech student, CSE Department, Hindu College of Engineering, Sonapat, D.C.U.R.S.T, Murthal, India

<sup>2</sup>Associate Professor, CSE Department, Hindu College of Engineering, Sonapat, D.C.U.R.S.T, Murthal, India

---

**Abstract:** Underwater sensor nodes will always have applications in underwater data collection, pollution monitoring, offshore exploration, disaster prevention, assisted navigation and tactical surveillance applications. Underwater networks consist of a variable number of sensors and vehicles that are deployed to perform collaborative monitoring tasks over a given area.

In this paper, several fundamental protocols used for underwater communication are compared and a new protocol better than the older ones is proposed. Different architectures for two-dimensional and three-dimensional underwater sensor networks are discussed, and characteristics of proposed protocol are discussed. The main challenges for the development of efficient networking solutions posed by the underwater environment are detailed and a cross-layer approach to the integration of all communication functionalities is suggested. Furthermore, open research issues are discussed and possible solution approaches are outlined.

**Keywords:** Underwater sensor network, Routing, Flooding Multipath, Cluster, AUV (autonomous underwater vehicle).

---

## I. INTRODUCTION

UWASN has rapidly increased interest from scientist and business group, because there are a large resources in the sea. As we know, human cannot go underwater for exploration and deployment cost in underwater based networks is much higher than terrestrial based networks.

Typically, communication in UWASN spends about ten thousand dollar. Large surface and depth result in underwater equipment for sparsely deployment. In the past three decade, most applications of UWASN are usually applied for undersea exploration. The UWASN is used for extracting oil and detecting reservoirs underwater, navigation, tactical surveillance. It is a long-term exploration and typically has spent many years to discover resources. For the application of the pollution monitoring, the UWASN are also used for disaster prevention, such as tsunami warning and seaquakes investigation. Besides, the military surveillance is also an important application for UWASN. The Navy uses UWASN to perform anti- submarine mission because submarines and underwater mines always cause serious damage. In the wireless sensor network (WSN), sensor nodes are restricted to work in low power consumption for power saving. The UWASN has more restrictions because of intrinsic properties.

The first among all is the propagation delay. The propagation speed in water ( $1.5 \times 10^3$  m/s) is lower than radio propagation speed ( $3 \times 10^8$  m/s). Second being the power consumption for underwater sensor. Underwater sensor nodes mainly use battery power. It is difficult task to change the battery for sensor node in water in fact is impossible [5].

For underwater applications, we can borrow many design principles and tools from present ground-based research. Some of the challenges are totally different. First, radio wave is not suitable for underwater usage because of extremely limited propagation (current radio transmit 50 100cm). While acoustic network is promising form of underwater communication, off-shelf acoustic modems are not suitable for underwater sensor-network with hundreds of nodes: their power drain

ranges and price points are all designed for sparse, long-range, expensive systems rather than small, dense, and cheap sensor-networks. Second, is the shift from RF to acoustics changes the physics of communication from the speed of light (3\_108m/s) to the speed of sound (around 1:5\_103m/s)—a difference of five orders of magnitude.

Energy conservation for underwater sensor-networks will be different than ground because the sensors will be in larger number, and because some important applications are required large amount of data, but are very infrequent (once per week or less).

## II. SYSTEM ARCHITECTURE

Before describing specific applications, we briefly review the general architecture we envision for an underwater sensor network. Figure 1 shows a diagram of the current tentative design. We anticipate a tiered deployment, here some of the nodes have greater resources.

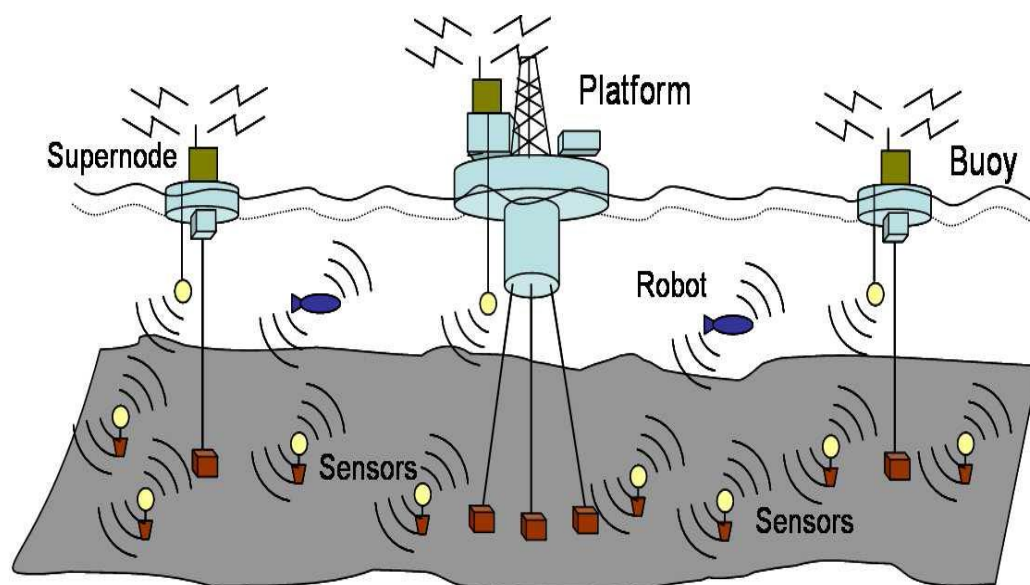


Fig. 1: different types of nodes in the system.

At the lowest layer, a large number of sensor nodes are deployed in the sea floor (shown as small yellow circles). They collect data through attached sensors (e.g., seismic) and they communicate with other nodes through short-range acoustic modems. They operate on batteries, and to operate for long periods they spend most of their life inactive. Several deployment strategies of these nodes are possible; here we show them anchored to the sea floor. (They could also be buried for protection.) Tethers ensure that nodes are positioned roughly where expected and allow optimization of placement for good sensor and communications coverage. Node movement is still possible due to anchor drift or disturbance from external effects. We expect nodes to be able to determine their locations through distributed localization algorithms.

However a number of problems confront us in achieving this goal. Some such as power efficiency, deployment and repair are common to wireless sensor network deployments on land, though more difficult in the underwater environment. Other issues render the problem radically different. A key issue is communications | current terrestrial wireless sensor network applications to date have used radio. At frequencies that are practical with low-cost radio chips and compact antennas, radio waves are attenuated so strongly in salt water that radio communications is impractical.

The calculations are simplistic and ignore protocol and routing overhead. Nevertheless we can see that the energy consumption by the underwater network is over four orders of magnitude lower with the use of AUV data mulling. If we further consider the cost of an optical communications board at \$50/node and the cost of the acoustic modem at \$3000/node, we argue that the most efficient way for collecting data from an underwater sensor network is using a system capable of optical communications with static and mobile nodes, such as the one described in this paper. The mobile

nodes will require power to navigate the sensor network but they can be easily recharged. The mobile node maximizes the lifetime and storage utilization for a underwater sensor network. We have created an asymmetry in the communications power required, enabling a low power operation on the nodes that are difficult to access and have energy reserves. By contrast, AUV which is mobile and can be recharged at the end of each task, takes on the energy's expensive role.

The energy per bit for acoustic modems is difficult to obtain. The WHOI modem [2] has a data rate of 220 bits/sec over 5000 m at 10W in transmission mode, or 20mJ/bit. The Aqua communication modem has a data rate of 480bit/s over 200m at 0.45W, or 4.5mJ/bit. Heidemann [7] anticipates 5kbit/s over 500m at 30mW transmits power but does not provide the total power required to show experimental results. For this analysis we have assumed 480bit/s at 4.5mJ/bit with a range of 150m. Thus the 6.86 Mbytes of data would require 1.3 days to transmit and the total energy consumed will be 247kJ. Because the modems have only 200m range data transfer require multiple hops. If the average path length in the network is 5km this will involve 25 hops, so the total energy consumed will be 6.2MJ. To avoid collisions in the shared acoustic medium, sophisticated MAC strategy would be required. This strategy may also require a clock synchronization protocol.

Acoustic communications are the typical physical layer technology in underwater networks. In fact, radio waves propagate at long distances through conductive salty water only at extra low frequencies (30 – 300Hz), which require large antennae and high transmission power. For example, the Berkeley MICA2 Motes, a popular experimental platform in the sensor networking community, have been reported to reach an underwater transmission range of 120 cm at 433MHz in experiments performed at the University of Southern California. Optical waves do not suffer from such high attenuation but are affected by scattering. Furthermore, transmitting optical signals requires high precision in pointing the narrow laser beams. Thus, communications in underwater networks are typically based on acoustic wireless communications.

The traditional approach for **ocean-bottom or ocean-column** monitoring is to deploy underwater sensors that record data during the monitoring mission, and then recover the instruments [15] [16].

The key benefits of terrestrial sensor networks stem from wireless operation, self-configuration, and maximizing the utility of any energy consumed. We are currently exploring how to extend these benefits to underwater sensor networks with acoustic communications. It is instructive to compare

current terrestrial sensor network practices to current underwater approaches. Terrestrial networks emphasize low cost nodes (around US\$100), dense deployments (at most a few 100m apart), multihop communication, short-range communication; by comparison, typical underwater wireless communication today are typically expensive (US\$10k or more), sparsely deployed (a few nodes, placed kilo meters apart), typically communicating directly to a .base-station. Over long ranges rather than with each other. We seek to reverse each of these design points, developing underwater sensor nodes that can be inexpensive, densely deployed, and communicating peer-to-peer.

### III. APPLICATIONS

Our approach is applicable to a number of applications, including seismic monitoring, equipment monitoring and leak detection, and support for swarm's underwater robots. We review their different characteristics as below:

#### 3.1 Seismic monitoring

A promising application for underwater sensor networks is seismic monitoring for oil extraction from underwater fields. Frequent seismic monitoring is of great importance in oil extraction. Studies of variation in the reservoir over time are called "4-D seismic" and are useful for judgment field performance and motivating intervention. Terrestrial oil fields can be frequently monitored, with fields typically being surveyed annually, or quarterly in some fields, and even daily or "continuously" in some gas storage facilities and permanently instrumented fields. However, monitoring of underwater oil fields is much more challenging, partly because seismic sensors are not currently permanently deployed in underwater fields. Instead, seismic monitoring of underwater fields typically involves a ship with a towed array of hydrophones as sensors and an air cannon as the actuator. Because such a study involves both large capital and operational costs (due to the ship and the crew), it is performed rarely, typically every 2–3 years. As a result, reservoir management approaches suitable for terrestrial fields cannot be easily applied to underwater fields.

Typical oilfields cover areas of 8km\_8km or less, and 4-D seismic which requires sensors to approximate a 50–100m grid. (We assume that seismic analysis can accommodate minor, known irregularities in sensor placement.) This implies a fairly large sensor network of several thousand sensors will be required to provide complete coverage. It also implies that a tiered communications network is required, where some super models will be connected to users via non-acoustic communications channels. Two possible implementations are buoys with high speed RF-based communications, or wired connections to some sensor nodes. For a grid deployment we assume one super model per 25 nodes (a 5x5 segment of the network), suggested all nodes are within two hops of a super models and time to retrieve all data is about one hour (assuming each super models can download data in parallel). Of course, one can trade-off the number of super models against the time required to retrieve the data. (With super models covering areas 4 hops wide, there is only one access point per 81 nodes, but data retrieval time will be much longer due to increased contention at the access point.) We expect to refine our design as we discovered more about the problem.

### 3.2 Equipment Monitoring and Control

Underwater equipment monitoring is a second example application. Long-term equipment monitoring may be done with pre-installed infrastructure. However, *temporary* monitoring would benefit from low-power, wireless communication. Temporary monitoring is most useful when equipment is deployed, to confirm successful deployment during initial operation, problems are detected. We are not considering node deployment and node retrieval at this time, but possibilities include remote-operated and robotic vehicles or divers. Short-term equipment monitoring shares many requirements of long-term seismic monitoring, including the need for wireless (acoustic) communication, automatic configuration into a multi hop network, localization (and hence time synchronization), and energy efficient operation. The main difference is a shift but infrequent sensing in seismic networks, to steady, frequent sensing for equipment monitoring. Once underwater equipments are connected with acoustic sensor networks, it becomes an easy task to remotely control and operate some of the equipments. Current remote operation is based on cables connecting to each piece of equipment. It has high cost for deployment and maintenance. In contrast, underwater acoustic networking is able to significantly reduce cost and provides much more flexibility.

### 3.3 Flocks of Underwater Robots

A third and very different application is supporting groups of underwater autonomous robots. Applications include coordinating adaptive sensing of chemical leaks or biological phenomena (for example, oil leaks or phytoplankton concentrations), and also equipment monitoring applications as described above.

Communication for coordinated action is essential when operating groups of robots on land. Underwater robots today are typically either fully autonomous but largely unable to communicate and coordinate with each other during operations, or tethered, and therefore able to communicate, but limited in deployment depth and maneuverability. We expect communications between underwater robots to below-rate information for telemetry, coordination, and planning. Data rates in our proposed system are not sufficient to support full-motion video and audio, but we do expect to be able to support on-line delivery of commands and the ability to send back still frame images.

Environmental-monitoring UW-ASNs can perform pollution monitoring (chemical, biological and nuclear). For example, it may be possible to detail the chemical slurry of antibiotics, estrogen-type hormones and insecticides to monitor streams, rivers, lakes and ocean bays (water quality in situ analysis)[30]. Monitoring of ocean currents and winds, improved weather forecast, detecting climate change, understanding and predicting the effect of human activities on marine ecosystems, biological monitoring such as tracking of fishes or micro-organisms, are other possible applications. For example, in[31], the design and construction of a simple underwater sensor network is described to detect extreme temperature gradients (thermo-clines), which are considered to be a breeding ground for certain marine micro-organisms.

- Undersea explorations. Underwater sensor networks can help detecting underwater oilfields or reservoirs, determine routes for laying under-sea cables, and assist in exploration for valuable minerals.
- Disaster prevention. Sensor networks that measure seismic activity from remote locations can provide tsunami warnings to coastal areas[25], or study the effects of submarine earthquakes (seaquakes).
- Assisted navigation. Sensors can be used to identify hazards on the seabed, locate dangerous rocks or shoals in shallow waters, mooring positions, submerged wrecks, and to perform bathymetry profiling.

- Distributed tactical surveillance. AUVs along with fixed underwater sensors can collaboratively monitor areas for surveillance, targeting and intrusion detection systems. For example, in [11], a 3D underwater sensor network is designed for a tactical surveillance system that is, able to detect and classify submarines, small delivery vehicles (SDVs) and divers based on the sensed data from mechanical, radiation, magnetic and acoustic micro-sensors. In respect to traditional radar/sonar systems, underwater sensor networks can reach a higher accuracy, and enable detection and classification of low signature targets by also combining measures from different types of sensors.
- Mine reconnaissance. The simultaneous operation of multiple AUVs with acoustic and optical sensors can be used to perform rapid environmental assessment and detect mine-like objects. Underwater networking is a rather unexplored area although underwater communications have been experimented since World War II, when, in 1945, an underwater telephone was developed in the United States to communicate with submarines [24]. Acoustic communications are the typical physical layer technology in underwater networks. In fact, radio waves propagate at long distances through conductive sea water only at extra low frequency (30–300 Hz), which require large number of antennae and high transmission power. For example, the Berkeley Mica 2 Motes, the most popular experimental platform in the sensor networking community, have been reported to have a trans-mission range of 120 cm in underwater at 433 MHz by experiments performed at the Robotic Embedded Systems Laboratory (RESL) at the University of Southern California. Optical waves do not suffer from such high attenuation but are affected by scattering. No failure detection. If failures or mis-configurations occur, it may not be possible to detect them before the instruments are recovered. This can easily lead to the complete failure of a monitoring mission.
- Limited storage capacity. The amount of data that can be recorded during the monitoring mission by every sensor is limited by the capacity of the onboard storage devices (memories, hard disks).

Therefore, there is a requirement of deployment of underwater networks that will enable real-time monitoring of selected ocean areas, remote configuration and interaction with onshore human operators. This can be obtained, by connecting the underwater instruments by means of wireless links based on acoustic communication.

Many researchers are currently engaged in developing networking solutions for terrestrial wireless ad hoc and sensor networks. Although there exists many recently developed network protocols for wireless sensor networks, the unique characteristics of the underwater acoustic communication channel, such as limited bandwidth capacity and variable delays [38], requires very efficient and reliable new data communication protocols.

#### IV. HARDWARE FOR UNDERWATER ACOUSTIC COMMUNICATIONS

Acoustic communications is a very promising method of wireless communication underwater. At the hardware level, underwater acoustic communication differs from in-the-air RF in a few key ways. In both systems we transmit a tone or carrier, which carries the data through modulation, such as amplitude, frequency or phase modulation. The primary differences between modulation techniques lie in the complexity of the receiver, the bandwidth required, and the minimum acceptable received signal-to-noise ratio (SNR). SNR is usually expressed as  $E_b/N_0$  or energy per bit over noise spectral density [20], [28].

##### 4.1 Transmit Power

There is no fundamental limit to transmitter power, but it can have a major effect on the energy budget for the system. For energy efficiency and to minimize interference with neighbouring transmitter we wish to use the smallest possible transmitter power.

##### 4.2 Data Rate

This is a tradeoff between available power and channel bandwidth. Because acoustic communications are possible only over fairly limited bandwidths, we expect a fairly low data rate by comparison to most radios. We see a rate of currently 5kb/s and perhaps up to 20kb/s. In application such as robotic control, the ability to communicate *at all* (even at a low rate) is much more important than the ability to send a large amount of data quickly.

**Noise Level:** Noise levels in the ocean have a critical effect on sonar performance, and have been studied extensively. Burdic [4] and Urick [27] are two standard references. We are interested in the frequency range between 200 Hz and 50 kHz (the mid frequency band). In this frequency range the dominant noise source is wind acting on the sea surface. Knudsen [17] has shown a correlation between ambient noise and wind force or sea state. Ambient noise increases about 5dB as the wind strength doubles. Peak wind noise occurs around 500 Hz, and then decreases about -6dB per octave. At a frequency of 10,000 Hz the ambient noise spectral density is expected to range between 28 dB/Hz and 50 dB/Hz relative to 1 micro Pascal. This suggests that there is a need for wide range control of transmitter power.

#### 4.3 Signal Attenuation

Attenuation is due to variety of factors. Both radio waves and acoustic waves experience  $1/R^2$  attenuation due to a spherical spreading. There are absorptive losses caused by the transmission media. Unlike in-the-air RF, absorptive losses in underwater acoustics which are significant and are very dependent on frequency. At 12.5kHz, absorption it is 1dB/km or less. At 70kHz it can exceed 20dB/km. This places a practical upper limit on the carrier frequency at about 100kHz. There are additional loss effects, mostly associated with scattering, refraction and reflections (see for a good overview). The major difference between RF and acoustic propagation is the velocity of propagation. Radio waves travel at speed of light. The speed of sound in water is around 1500 m/s, and it varies significantly along with temperature, density and salinity, causing acoustic waves to travel on curved paths. This can create silent zones where the transmitter is inaudible. There are losses caused by multipath reflections from the surface, obstacles, the bottom, and temperature variations in the water and scattering from reflections off a potentially rough ocean surface.

#### 4.4 Proposed Acoustic Communications Design

Many of these forms of loss are unique to acoustic communication at longer distances. In particular, multipath reflections, temperature variation, and surface scattering are all exaggerated by distance. Inspired by the benefits of short range RF communication in sensor networks, we seek to exploit short-range underwater acoustics where our only significant losses are spreading and absorption. We are developing a multi-hop acoustic network targeting communication distances of 50-500 meters. Using a simple FSK signaling scheme we anticipate sending 5kb/s over range of 500m using a 30 mW transmitter output. The primary limitation is set by spreading loss and the background noise of the ocean. Low-power listening is an important technique in RF-based sensor networks [23], [15], [9], [19]. We are also developing a very low power wakeup receiver to better support low-power listening. This receiver is not intended for data exchange, but only to detect possible transmission by checking acoustic energy in the channel. When transmission is detected, it wake up the data receiver to communicate. Our current hardware design using a dual gate FET configured as a case code amplifier, with a passive filter and detector. The filter has a Q of 30, and center frequency of 18 kHz. The circuit consumes 100mA at 5 volts (500mW).

## V. RESULT

Acoustic communication puts new constraints on *networks* of underwater sensor nodes for several reasons. First, the large propagation delay may break or significantly degrade the performance of many current protocols. For example, propagation delay for two nodes at 100m distance is about 67ms. Second, the bandwidth of an acoustic channel is much lower than that of a radio. Efficient bandwidth utilization becomes an important issue. Unlike terrestrial networks, underwater sensor networks cannot take advantage of rich existing infrastructure GPS. We next examine several research directions at the network level.

#### 5.1 Latency-Tolerant MAC Protocols

MAC protocols suitable for sensor networks can be broadly classified into two categories [29]: scheduled protocols, *e.g.*, TDMA, and contention protocols, *e.g.*, CSMA. TDMA has good energy efficiency, but requires strict time synchronization and is not flexible to changes in the number of nodes. Currently, contention-based protocols with low duty cycles are widely studied by the sensor network community and results are promising. However, the large propagation delay in acoustic communications is particularly harmful to contention based protocols for several reasons. First, it may take very long time for a node to detect concurrent transmission with carrier sense. Figure 2 shows the periodic listen and sleep schedule for a sensor node running S-MAC in low duty cycles. The top part (a) shows the length

of the listen window in current implementation in Tiny OS, which is about 120ms for listening SYNC, RTS and CTS packets. The bottom part (b) show a naive extension to SMAC where we modify the listening window to accommodate the propagation delays for each packet, now about 320ms. With this naive approach, a propagation delay will significantly increase the actual duty cycles of nodes, increase latency and decrease throughput, especially in multi-hop networks. Clearly a major focus of MAC research will be to redesign media access protocols from the ground up to consider large propagation delays, rather than to simply adapt existing MAC protocols.

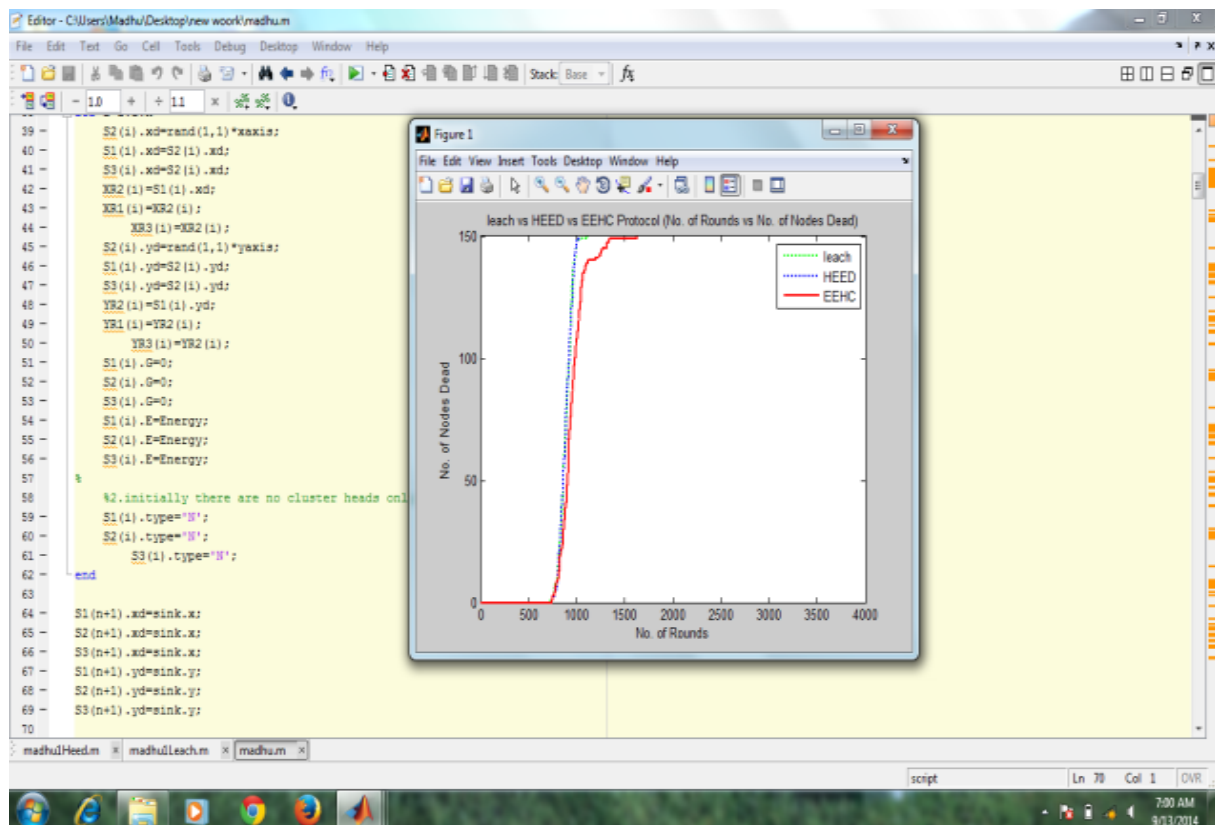


Fig. 2: Comparison of Leach, Heed and EECH protocols

## 5.2 Time Synchronization

Without GPS, distributed time synchronization provides fundamental support for many protocols and applications. Several algorithms have been developed for radio-based sensor networks, such as RBS [10] and TPSN [13], achieving the accuracy of tens of microseconds [10], [13]. However, they assume nearly instantaneous wireless communication between sensor nodes, which is valid enough for radio networks (e.g.,  $0.33 \mu\text{s}$  for nodes over 100m). In underwater acoustic networks, the large propagation delay becomes a dominant source of error in these protocols. Hence we have designed a new protocol, Time Synchronization for High Latency (TSHL), that well manages the errors induced by the large propagation latency [26].

TSHL splits time synchronization into two phases. In the first phase, nodes model their clock skew to a centralized time base, after which they become *skew synchronized*. In the second phase they swap *skew compensated* synchronization messages to determine their exact offset.. At all distances, clock synchronization accuracy of TSHL is much better than RBS (by a factor of two or more), since RBS does not consider propagation latency at all. Figure 3 compares TSHL against TPSN, a protocol that considers propagation delay but not clock skew. At short distances of less than 50m, synchronization accuracy of TSHL and TPSN are comparable, since for these distances clock skew during synchronization is minimal. At longer distances the clock skew causes increasing errors in TPSN, up to twice the error in TSHL at 500m. These values are immediately after the algorithm runs.

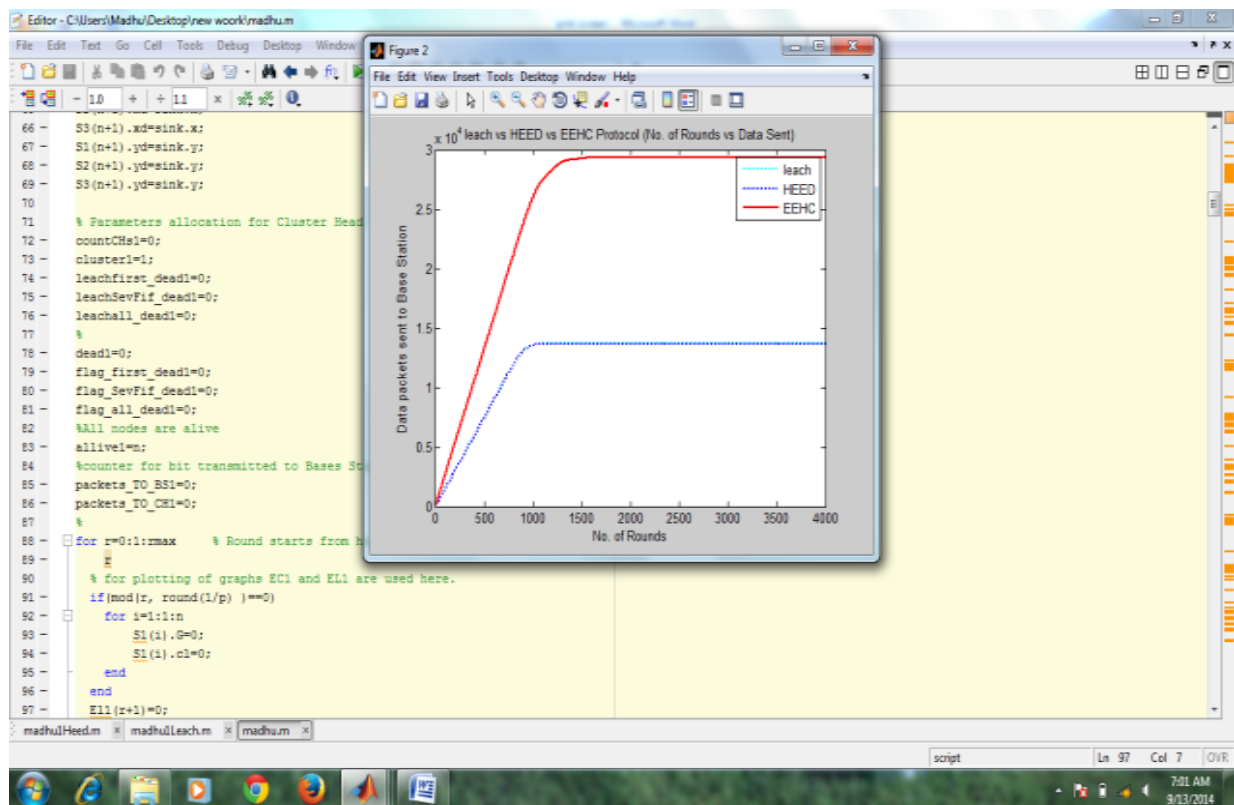


Fig. 3: Number of data packets transferred per 1000 rounds

### 5.3. Localization

Localization is the process for each sensor node to locate its positions in the network. Localization algorithms developed for terrestrial sensor networks are either based on the signal strength [2], [3] or the time-of-arrival (TOA) [22], [14]. Signal strength only gives proximity information but not accurate locations TOA-based algorithms provide fine-grained location information, which is required by our seismic imaging application. TOA-based algorithms estimate distances between nodes by measuring the propagation time of a signal. The basic principle is the same as radar or sonar, but is carried out in a distributed way among peering nodes. TOA measurement requires precise time synchronization between a sender and a receiver, and here we rely on our time synchronization work described in Section V-B. Once the measurement is done among neighbouring nodes, multi alteration algorithms are applied for each node to calculate its relative position to some reference nodes. If super models are placed on buoys, they are able to use GPS to obtain precise global locations, which can then be used as references to all underwater nodes. If super models are connected via wired networks, then we assume their locations can be surveyed when they are deployed and so they can again offer points of location reference. While similar localization systems have been developed for terrestrial sensor networks (*e.g.*, [18]), the accuracy of such systems need to be evaluated in the underwater environment.

### 5.4. Network Re-Configuration

Undersea seismic monitoring of oil fields is an “all or nothing” application—periodically a seismic experiment will be triggered and all nodes must collect high-resolution seismic data for a few minutes, then a few months may go by with no activity. It would be extremely wasteful to keep the network fully operational for months at a time to support occasional measurements. Instead, we expect to put the whole network to sleep for the entire inactive period, and let it restart quickly when needed. Similar approaches are also appropriate for long term equipment monitoring, where nodes only need to check equipment status once a day or a week [21]. This type of network configuration is in effect “sensor network suspend and resume”. It is different than low-duty-cycle MAC protocols, which provides the illusion that the network is always up. The major research issue is how to efficiently re-configure the network after a long sleep period. Nodes will agree on the same “resume” moment before entering the periodical long sleep. However, due to clock drift, they will



wake up at different moments. When the drift rate is 50 parts per million, the maximum clock difference after 30 days is about 130 seconds. A naive approach is to let each node wait in listening mode for twice the maximum clock drift, counting two possible directions of drifts. Thus, it requires at least four minutes to reboot the whole network!

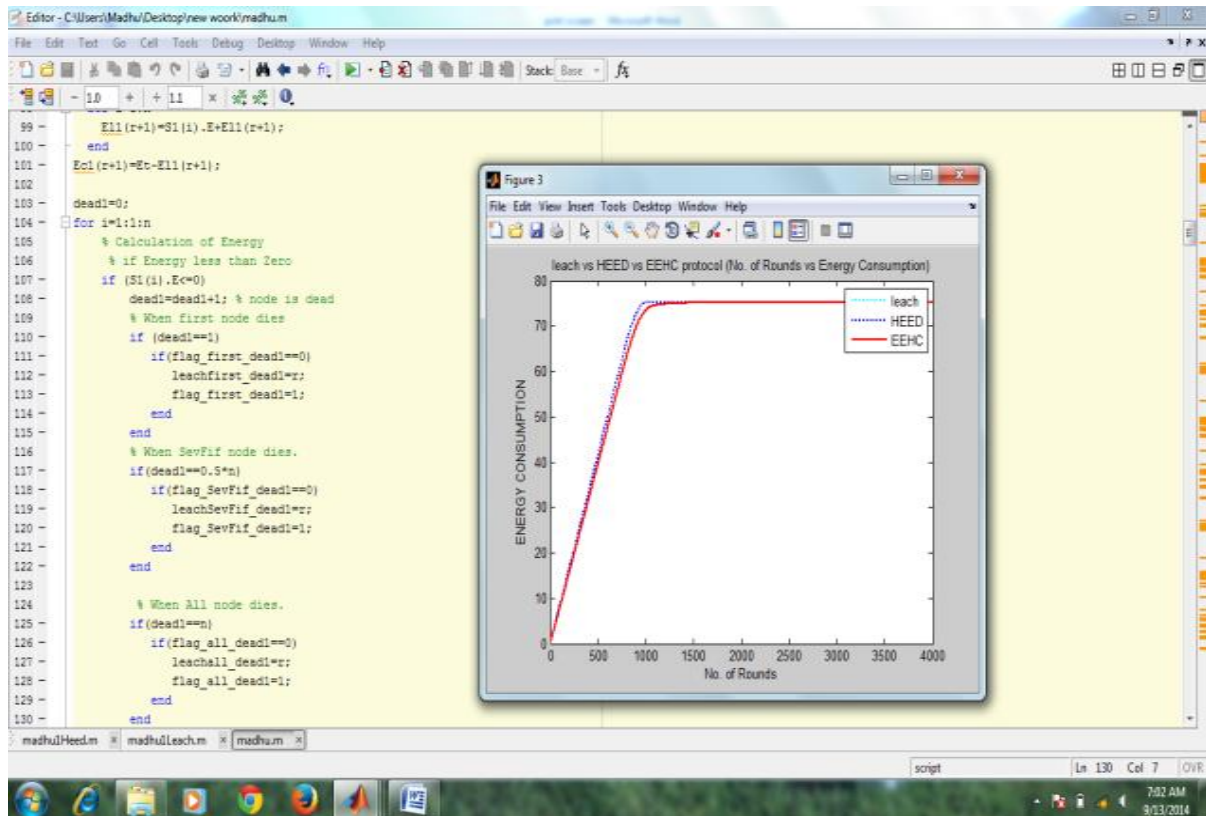


Fig. 4: Energy consumption per 500 rounds

We propose two approaches. The first one is low power listening with flooding. Right after nodes wake up asynchronously, they set up a timer that is twice the length of the maximum clock drift and perform low-power listening (sampling the channel for activity [9], [15]). When the first node times out, all nodes should have restarted. It sends a “Network Up” message immediately and the whole network starts flooding the message. Upon receiving the propagated message, nodes realize the network has resumed and data transmissions can begin immediately. This approach restarts network quickly by flooding and nodes stays energy efficient with low power listening. Our second protocol, requests with suppression, tries to avoid the flooding overhead. The first node that wakes up sets the network resume time. When a new node wakes up, it sends a request packet to get the time from any already active nodes. To save energy, both requests and replies are suppressed if possible using random delays—nodes listen for concurrent requests or replies and use them as their own.

### 5.5. Application-Level Data Scheduling

Besides these energy constraints, acoustic networks also have very limited communicating bandwidth. Today’s off-the-shelf acoustic modems typically have the bandwidth between 5–20Kb/s. With applications like seismic imaging, all nodes collect and try to send large amount of data that can easily overwhelm the network capacity. The research issue here is how to coordinate node’s transmissions in an energy-efficient way which can utilize the channel in best way. Currently, MAC protocols operating at 1–10% duty cycle provide the abstraction of the network that is always up by transparently delaying packets until the next awake period. This approach is not efficient for nodes to transmit large data at about the same time, as excessive MAC-level contention waste the bandwidth and the energy. Instead we will explore explicit application-level data caching and forwarding. Building on the work of Delay Tolerant Networking, we plan to package sensor network readings and pass them from sensor node to sensor node.

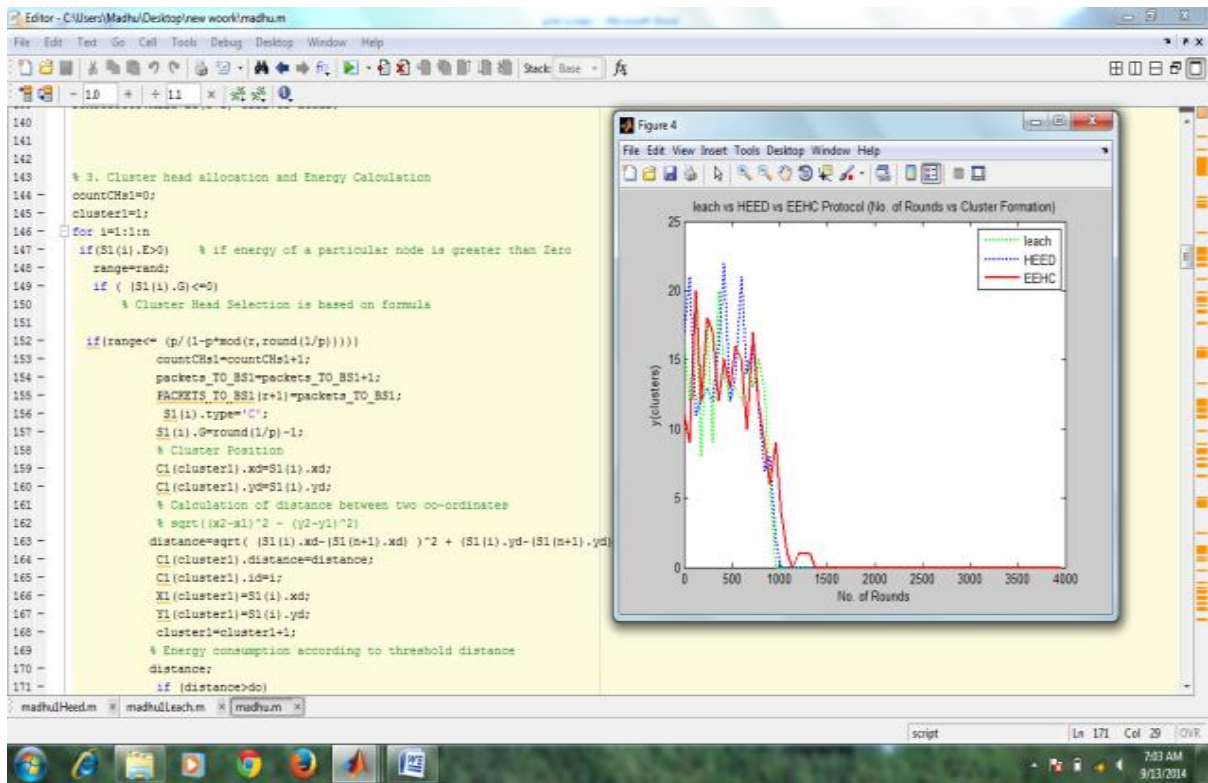


Fig. 5: Number of rounds

If instead we schedule nodes to transfer data in the order given by node-id, then in the worst case, the nodes nearest X are each up for only 48 minutes (a savings of 77%), and edge nodes for only 16 minutes. Scheduling transmissions at the application level avoids excessive MAC-level contentions and can better utilize the channel and save energy.

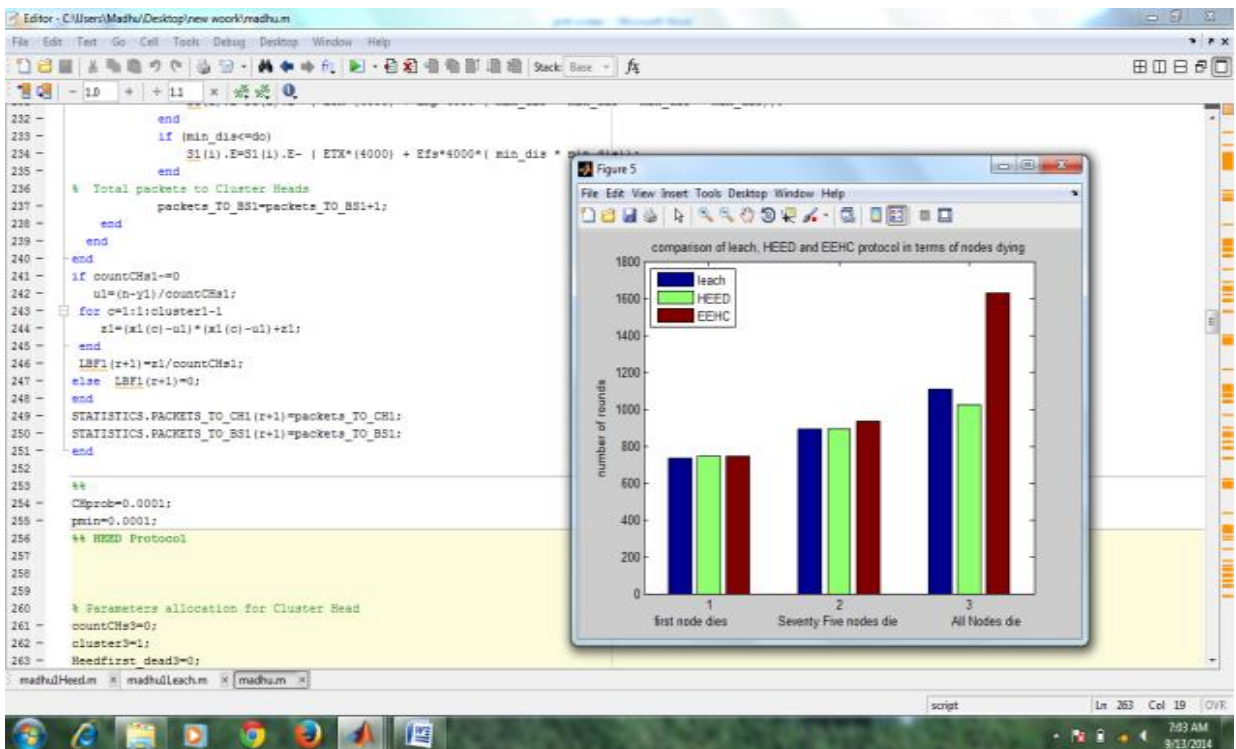


Fig. 6: Comparative study

## REFERENCES

- [1] Benthos, Inc. Fast And Reliable Access To Undersea Data.
- [2] J. Beutel. Geolocation in a picoradio environment. Master's thesis, UC Berkeley, July 1999.
- [3] N. Bulusu, J. Heidemann, and D. Estrin. GPS-less low cost outdoor localization for very small devices. *IEEE Personal Communication Magazine*, 7(5):28–34, Oct. 2000
- [4] W. S. Burdick. *Underwater Acoustic Systems Analysis*. Prentice-Hall, 1984.
- [5] B. Chen, K. Jamieson, H. Balakrishnan, and R. Morris. Span: an energyefficient coordination algorithm for topology maintenance in ad hoc wireless networks. In *Proceedings of the ACM International Conference on Mobile Computing and Networking*, Rome, Italy, July 2001.
- [6] D. L. Codiga, J. A. Rice, and P. A. Baxley. Networked acoustic modems for real-time data delivery from distributed subsurface instruments in the coastal ocean: Initial system deployments and performance. *Journal of Atmospheric and Oceanic Technology*, 21(2):331–346, Feb. 2004.
- [7] Crossbow Technologies, Inc. <http://www.xbow.com/>.
- [8] J. R. Delaney and A. D. Chave. Neptune: A fiber-optic ‘telescope’ to inner space. *Oceanus*, 42(1):10–11, spring 2000.
- [9] El-Hoiydi. Spatial TDMA and CSMA with preamble sampling for low power ad hoc wireless sensor networks. In *Proceedings of The Seventh International Symposium on Computers and Communications (ISCC)*, pages 685–692, July 2002.
- [10] J. Elson, L. Girod, and D. Estrin. Fine-grained network time synchronization using reference broadcast. In *Proceedings of the fifth USENIX Symposium on Operating System Design and Implementation (OSDI)*, Boston, MA, Dec. 2002.
- [11] K. Fall. A delay-tolerant network architecture for challenged internets. In *Proceedings of the ACM SIGCOMM Conference*, pages 27–34, Karlsruhe, Germany, Aug. 2003.
- [12] L. Freitag, M. Stojanovic, M. Grund, and S. Singh. Acoustic communications for regional undersea observatories. In *Proceedings of the Oceanology International*, London, U.K., Mar. 2002.
- [13] S. Ganeriwal, R. Kumar, and M. B. Srivastava. Timing-sync protocol for sensor networks. In *Proceedings of the first ACM Conference on Embedded Networked Sensor Systems (SenSys)*, pages 138–149, Los Angeles, CA, Nov. 2003.
- [14] L. Girod and D. Estrin. Robust range estimation using acoustic and multimodal sensing. In *Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems*, Maui, Hawaii, Oct. 2001.
- [15] J. Hill and D. Culler. Mica: a wireless platform for deeply embedded networks. *IEEE Micro*, 22(6):12–24, 2002.
- [16] J. Hill, R. Szewczyk, A. Woo, S. Hollar, D. Culler, and K. Pister. System architecture directions for networked sensors. In *Proceedings of the 9th International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 93–104, Cambridge, MA, USA, Nov. 2000.
- [17] V. Knudsen, R. Alford, and J. Emling. Digital communications. *Journal of Marine Research*, 7(12):410, 1948.
- [18] W. Merrill, L. Girod, J. Elson, K. Sohrabi, F. Newberg, and W. Kaiser. Autonomous position location in distributed, embedded, wireless systems. In *IEEE CAS Workshop on Wireless Communications and Networking*, Pasadena, CA, Sept. 2002.
- [19] J. Polastre, J. Hill, and D. Culler. Versatile low power media access for wireless sensor networks. In *Proceedings of the 2nd ACM Conference on Embedded Networked Sensor Systems (SenSys)*, pages 95–107, Baltimore, MD, USA, Nov. 2004.

- [20] W. Lynn. 3D, 4D, and beyond. *Journal of Petroleum Engineering*, page 35, January 1998.
- [21] Alex (Sandy) Pentland, Richard Fletcher, and Amir Hasson. DakNet: Rethinking connectivity in developing nations. *IEEE Computer*, 37(1):78.83, January 2004.
- [22] John G. Proakis. *Digital Communications*. McGraw-Hill, 1995.
- [23] Quazi and W. Konrad. Underwater acoustic communications. *IEEE Communications Magazine*, 20(2):24. 30, March 1982.
- [24] Nithya Ramanathan, Mark Yarvis, Jasmeet Chhabra, Nandakishore Kushalnagar, Lakshman Krishnamurthy, and Deborah Estrin. A stream-oriented power management protocol for low duty cycle sensor network applications. In *Proceedings of the IEEE Workshop on Embedded Networked Sensors*, pages 53.62, Sydney, Australia, May 2005. IEEE.
- [25] Andreas Savvides, Chih-Chieh Han, and Mani B. Srivastava. Dynamic fine-grained localization in ad-hoc networks of sensors. In *Proceedings of the 7th ACM International Conference on Mobile Computing and Networking*, pages 166.179, Rome, Italy, July 2001.
- [26] Curt Schurgers, Vlasios Tsiatsis, Saurabh Ganeriwal, and Mani Srivastava. Optimizing sensor networks in the energy-latency-density space. *IEEE Transactions on Mobile Computing*, 1(1):70.80, 2002.
- [27] Curt Schurgers, Vlasios Tsiatsis, and Mani B. Srivastava. STEM: Topology management for energy efficient sensor networks. In *Proceedings of the IEEE Aerospace Conference*, page to appear, Big Sky, Montana, USA, March 2002. IEEE.
- [28] Ethem M. Sozer, Milica Stojanovic, and John G. Proakis. Underwater acoustic networks. *IEEE Journal of Oceanic Engineering*, 25(1):72.83, January 2000.
- [29] M. Stojanovic, J. G. Proakis, J. A. Rice, and M. D. Green. Spread-spectrum methods for underwater acoustic. In *Proceedings of the IEEE OCEANS'98 Conference*, volume 2, pages 650.654, Nice France, September 1998.
- [30] Affan Syed and John Heidemann. Time synchronization for high latency acoustic networks. Technical Report ISI-TR-2005-602, USC/Information Sciences Institute, April 2005. Under submission.
- [31] Yu-Chee Tseng, Chih-Shun Hsu, and Ten-Yueng Hsieh. Power-saving protocols for IEEE 802.11-based multi-hop ad hoc networks. In *Proceedings of the IEEE Infocom*, pages 200.209, New York, NY, June 2002. IEEE.